



Holloway

HAMMERHEAD SLINGS

Holloway Hammerhead Endless Slings. The most durable slings produced using the highest strength synthetic rope, Plasma.


Plasma 12-Strand Modulus Polyethylene (HMPE) that is enhanced by Cortland's patented recrystallization process. Each sling is then covered with a braided Polyester cover utilizing our priority braiding machine. Each sling is then covered with an abrasion resistant FiberLock coating. The lower load slings are color coded based on vertical working loads. Custom colors are available. Each Sling is proof loaded and certification covering utilizing fibers such as Spectra, Kevlar, etc. is available.

Rated Capacities in Pounds

Part No.	Vertical*	Choker	Vertical Basket	Working length	Open Dia.	Open Sling Dia.	Approx. Weight per Sling
HH-1-EPC	4,900	2,450	4,900	2	1/2	1/2	0.10
HH-2-EPC	10,500	5,250	10,500	2	1/2	1/2	0.10
HH-4-EPC	21,000	10,500	21,000	2	1/2	1/2	0.10
HH-6-EPC	31,500	15,750	31,500	2	1/2	1/2	0.10
HH-8-EPC	42,000	21,000	42,000	2	1/2	1/2	0.10
HH-10-EPC	52,500	26,250	52,500	2	1/2	1/2	0.10
HH-12-EPC	63,000	31,500	63,000	2	1/2	1/2	0.10
HH-14-EPC	73,500	36,750	73,500	2	1/2	1/2	0.10
HH-16-EPC	84,000	42,000	84,000	2	1/2	1/2	0.10
HH-18-EPC	94,500	47,250	94,500	2	1/2	1/2	0.10
HH-20-EPC	105,000	52,500	105,000	2	1/2	1/2	0.10
HH-22-EPC	115,500	57,750	115,500	2	1/2	1/2	0.10
HH-24-EPC	126,000	63,000	126,000	2	1/2	1/2	0.10
HH-26-EPC	136,500	68,250	136,500	2	1/2	1/2	0.10
HH-28-EPC	147,000	73,500	147,000	2	1/2	1/2	0.10
HH-30-EPC	157,500	78,750	157,500	2	1/2	1/2	0.10
HH-32-EPC	168,000	84,000	168,000	2	1/2	1/2	0.10
HH-34-EPC	178,500	89,250	178,500	2	1/2	1/2	0.10
HH-36-EPC	189,000	94,500	189,000	2	1/2	1/2	0.10
HH-38-EPC	199,500	99,750	199,500	2	1/2	1/2	0.10
HH-40-EPC	210,000	105,000	210,000	2	1/2	1/2	0.10
HH-42-EPC	220,500	110,250	220,500	2	1/2	1/2	0.10
HH-44-EPC	231,000	115,500	231,000	2	1/2	1/2	0.10
HH-46-EPC	241,500	120,750	241,500	2	1/2	1/2	0.10
HH-48-EPC	252,000	126,000	252,000	2	1/2	1/2	0.10
HH-50-EPC	262,500	131,250	262,500	2	1/2	1/2	0.10
HH-52-EPC	273,000	136,500	273,000	2	1/2	1/2	0.10
HH-54-EPC	283,500	141,750	283,500	2	1/2	1/2	0.10
HH-56-EPC	294,000	147,000	294,000	2	1/2	1/2	0.10
HH-58-EPC	304,500	152,250	304,500	2	1/2	1/2	0.10
HH-60-EPC	315,000	157,500	315,000	2	1/2	1/2	0.10
HH-62-EPC	325,500	162,750	325,500	2	1/2	1/2	0.10
HH-64-EPC	336,000	168,000	336,000	2	1/2	1/2	0.10
HH-66-EPC	346,500	173,250	346,500	2	1/2	1/2	0.10
HH-68-EPC	357,000	178,500	357,000	2	1/2	1/2	0.10
HH-70-EPC	367,500	183,750	367,500	2	1/2	1/2	0.10
HH-72-EPC	378,000	189,000	378,000	2	1/2	1/2	0.10
HH-74-EPC	388,500	194,250	388,500	2	1/2	1/2	0.10
HH-76-EPC	399,000	199,500	399,000	2	1/2	1/2	0.10
HH-78-EPC	409,500	204,750	409,500	2	1/2	1/2	0.10
HH-80-EPC	420,000	210,000	420,000	2	1/2	1/2	0.10
HH-82-EPC	430,500	215,250	430,500	2	1/2	1/2	0.10
HH-84-EPC	441,000	220,500	441,000	2	1/2	1/2	0.10
HH-86-EPC	451,500	225,750	451,500	2	1/2	1/2	0.10
HH-88-EPC	462,000	231,000	462,000	2	1/2	1/2	0.10
HH-90-EPC	472,500	236,250	472,500	2	1/2	1/2	0.10
HH-92-EPC	483,000	241,500	483,000	2	1/2	1/2	0.10
HH-94-EPC	493,500	246,750	493,500	2	1/2	1/2	0.10
HH-96-EPC	504,000	252,000	504,000	2	1/2	1/2	0.10
HH-98-EPC	514,500	257,250	514,500	2	1/2	1/2	0.10
HH-100-EPC	525,000	262,500	525,000	2	1/2	1/2	0.10

Features

- Light Weight
- Repairable
- Inspection and recertification
- Low Stretch
- Easy Handling
- High Strength

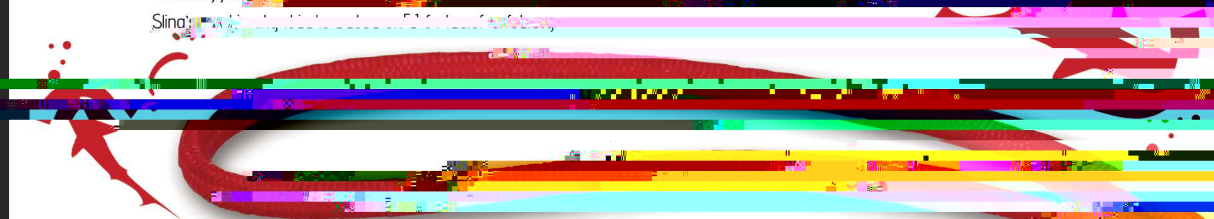



Holloway

WIRE ROPE SHACKLE VS



HAMMER

HHI Part Number	Rope Diameter Inches	Vertical WLL Metric Tons	G-2160 SHACKLE WLL (mt)	Wire Rope WLL (ins.)	WLL (ins.)
HH-9-EPC	0.375	2.1	7	16	187
HH-11-EPC	0.4375	3.4	7	18	333
HH-13-EPC	0.5	4.69	7	16	326
HH-16-EPC	0.625	7.7	12.5	20	472
HH-18-EPC	0.75	10.8	17.5	24	704
HH-22-EPC	0.875	13.96	18	25	206
HH-24-EPC	1	16.47	18	25	250

