# Electric Chain Hoists

## Enhanced Features

### UL® Listed*

Certified and listed to UL 1340 “Standard for Hoists.”

### Easy Access Suspension

External pins allow for quick change from hook to lug for trolley mount configurations on most models.

### Green Initiative

Built smarter without the use of harmful materials. Environmentally friendly. RoHS compliant.

### Notched Hook Enhaen59580l(o)0.9(4)-7.4( )]Th.

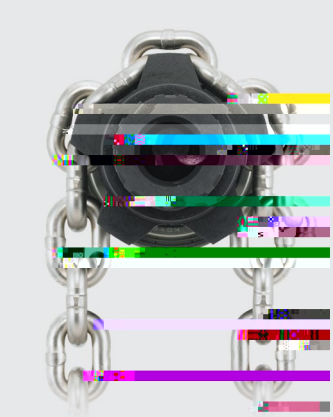

# Electric Chain Hoists

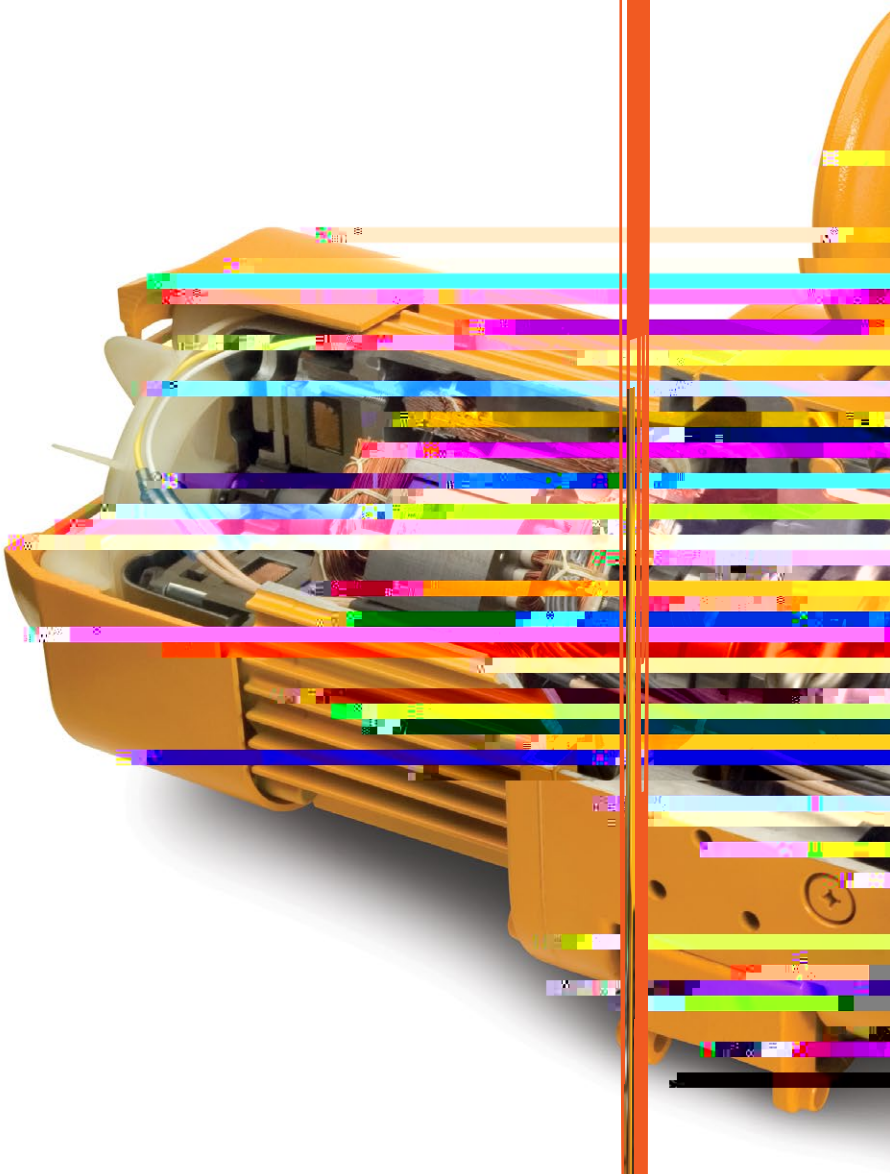

# NER/ER Large Capacity Electric Chain Hoists with Hook and Lug Suspensions

Large capacity lifting is now available in both our NER and ER models. Our three phase electric chain hoists provide the duty cycle, durability and ease of operation needed to support most heavy lifting applications.

## Features and Benefits

Large Capacity Range
NER/ER 8 Ton – 20 Ton
(See page 8 for 1/8 – 5 Ton

Standard Voltage
208-230/460-3-60
Optional voltages available
Dual speed models are not reconnectable

Control Voltage
110V (optional 24V)

Classification*
ASME H4
ISO M4
FEM 2M or 1Am

Conformance**
UL 1340

Duty Cycle*
Single Speed – 60 Min.
Dual Speed – 30/10 Min. with VFD

Ratings
Hoist – IP55
Pendant – IP65

Upper / Lower Limit Switch
Overwinding/overlifting device
Standard on all models

Standard Pendants
Single speed: 2-button
(momentary contacts)
Dual speed: 2-button
(momentary contacts)
with emergency On/Off
(maintinpinpcu2(pl)-1 6Q1m()44.2(m)-6.6(o)-7.7(m)-3.4(en)11.7(ta)2.1(r)-21.62e.9(n)11.74

SINGLE8 0 l S Q q97.398 cm 0 0 mm 02 l S Q fq97. Q 1q97E

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

# NERM/ERM Large Capacity Electric Chain Hoists with Motorized Trolleys

MR trolleys are suitable for harsh or outdoor applications and easily couple with NER/ER large capacity hoists for the heaviest lifting and traversing requirements. Features include thermal motor protection, side guide rollers for smooth operation and plug in electrical connections.

Features and Benefits

Capacity Range
8 Ton – 20 Ton
(See page 14 for 1/8 – 5 Ton)

Standard Voltage
208-230/460-3-60
Optional voltages available
Dual speed models are not reconnectable

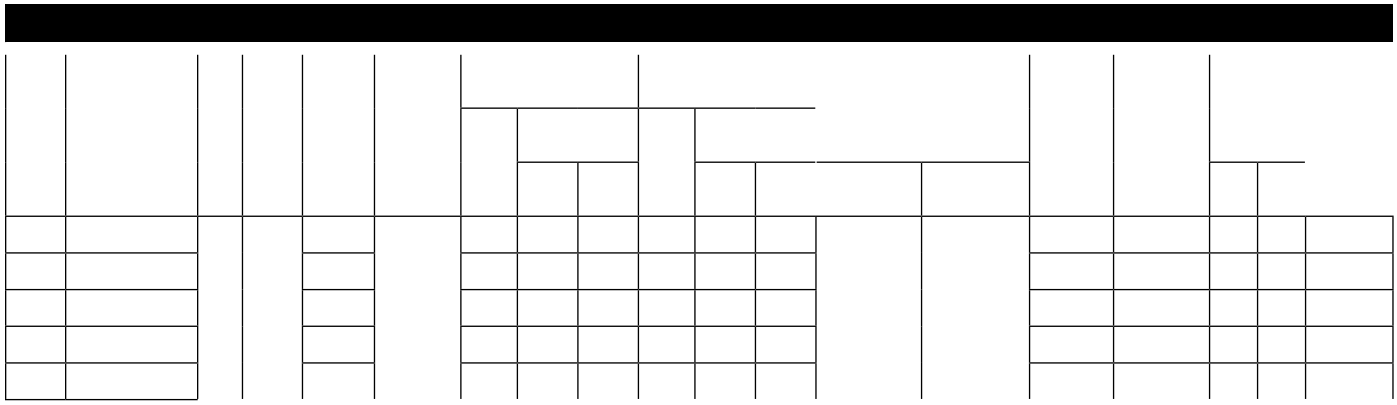

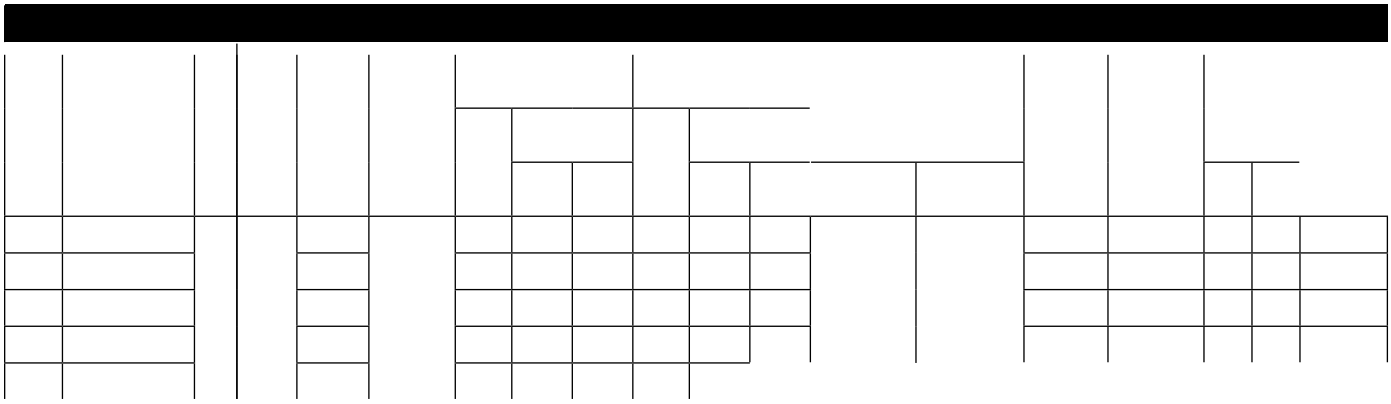

## SINGLE SPEED HOIST WITH PUSH OR GEARED TROLLEY

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |