

TNER Series Theatrical Chain Hoists

Unique Features

Standards

Hoist exceeds stringent world standards; complies with German regulation BGman


Size and Speed

Designed to fit standard road cases.

½ and 1 Ton—16 fpm;
2 Ton—8 fpm.

Grease-Packed Gearbox

For demanding theatrical applications.
Maintenance free.




Nickel-Plated Load Chain

Meets DIN and EN 818-7 standards.
Optional black chain available.


Friction Clutch

Carbon friction material provides consistent performance over a wide temperature range.



Chain Container

Reversible black canvas chain container needed to meet BGV-D8 regulations.
Also designed with two secure attachment points.

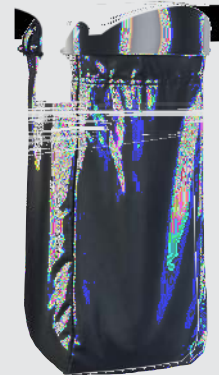

Optional Pendant Control (Pickle)

Red button emergency stop.
NEMA 4X, UL/cUL (CSA) listed.

TNER Series Theatrical Chain Hoists

Swivel Top and Bottom Hooks
Both hooks swivel 360 degrees. Ball bearings produce smooth rotation. Heavy duty hook latches standard.

Heavy Duty Motor
Increased performance and standard thermal motor protection.

Quiet Load Sheave
Deep groove pockets fully support the load chain during operation. Reduces vibration and chain wear and provides a true vertical lift.

